



**PUMP TECHNICAL
SERVICES LIMITED**



THE SUBMERSIBLE PUMP SPECIALISTS


MANUFACTURING | SALES | PROJECT DESIGN | INSTALLATION | MAINTENANCE AND REPAIRS



HEBEFIX PLUS / EXTRA

RESIDENTIAL TECHNOLOGY

COMPACT LIFTING STATIONS

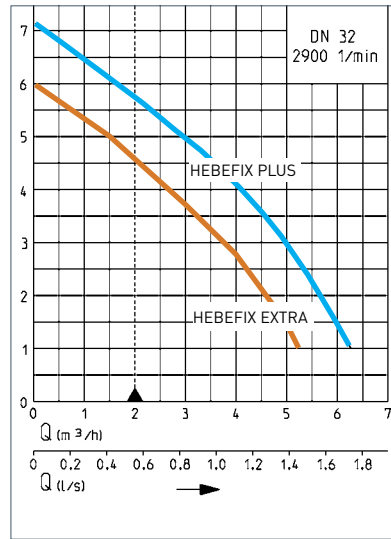

HEBEFIX PLUS - FRONT-WALL INSTALLATION



HEBEFIX PLUS - DIRECT CONNECTION



HEBEFIX EXTRA - AGGRESSIVE MEDIA



THE SUBTLE DIFFERENCE

The two Hebefix models. The **plus** model sets new standards in modern bathroom design. The compact form of the tank allows it to be mounted in all commercial front-wall as well systems as directly below the washbasin. It has various inlet openings for the connection of showers, bathtubs or washing machines.

For aggressive media such as saline fluids from the regeneration of water softening plants or condensate from condensing boilers and air-conditioning units (pH \geq 2.7), the **extra** model is the perfect option.

TARGET GROUPS

- ▶ A variant of the tried and tested U3K cellar drainage pump is integrated
- ▶ Flushing device reduces deposits in the tank
- ▶ Flexible use thanks to discharge branch on the right or left and five inlet options
- ▶ Integrated alarm with potential-free contact
- ▶ Odour-less due to activated carbon filter
- ▶ Smooth, scratch-free surface for easy cleaning
- ▶ With comprehensive installation accessories (check valve, plug-in seals, etc.)
- ▶ Two models are available: **plus** and **extra**

TECHNICAL DATA

Voltage Volt	Motor rating P1 (W)	Weight kg	Hmax m	Qmax m ³ /h
230	320 (plus) 300 (extra)	7	7 (plus) 6 (extra)	6.3 (plus) 5.3 (extra)
Dimensions (hxwx) in mm	Pressure pipe	Inlets mm	Code no.	
411 x 425 x 183	DN32 (Ø40)	1 x Ø40 4 x Ø50	JP48428 (plus) JP48429(extra)	

Accessories: Installation kit for inspection opening **JP41075**
 Stop valve, 1¼" **JP44785**
 Ball valve, 1¼" in stainless steel **JP46111**